




SILL BENEFITS

- Uniform manufacturing for sound dimensions
- 4000 PSI concrete in 28 days
- Reinforced with (1) - #3, grade 60 rebar
- Finish bonds well to paint, mortar, and stucco
- Wind Rated - safe lateral load of 637 lbs/ft based on ACI 530 when set in full bed of type M or S mortar on 8" hollow concrete masonry unit.


SILL SIZES

19" (1'7"), 26-1/2" (2'2.5"), 37" (3'1"), 48" (4'0"), 53" (4'5"), 60" (5'0"), 74" (6'2")

SILL DIMENSIONS

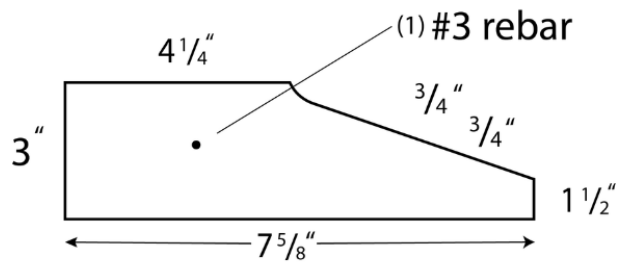

WINDSTORM - FLUSH

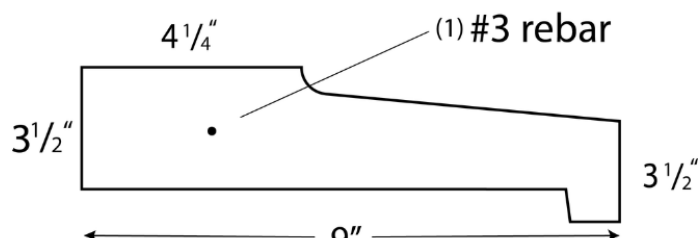

WINDSTORM - FACE